

## TECHNICAL INFO


Glass lagging tapes are designed to replace asbestos. Woven edge tape is available in thicknesses of 1/32", 1/16", 1/8" and 1/4" and widths from 2" to 6".

These tapes are used with fiberglass lagging cloth as an edging for seam sealing. They are also used as a replacement for asbestos tape in wrapping pipes for personnel protection. The tape meets MIL-C-20079S Type II, Class 1 and doesn't need testing under USCG/IMO since it is made only of glass.

The tape is applied with adhesives/coatings meeting MIL-A-3316, Class 1, Grade A and/or adhesives meeting USCG 164.112.

## Applications

- Pipe Wrapping
- Gasketing
- Expansion Joints
- Heat Shields
- OEM Applications
- Tadpole Tape

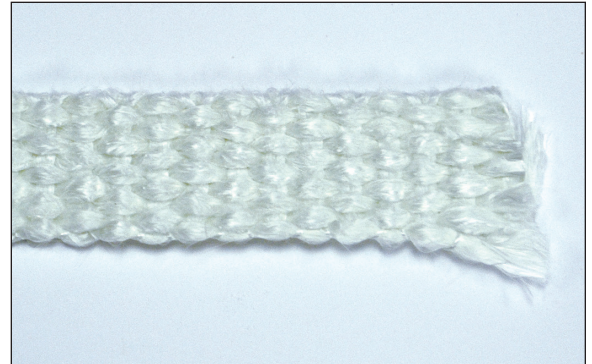

## Specifications

**Color:** White

**Weight:** 6 oz/square yard

**Weave:** Plain

**Finish:** Plain

**Fiber:** 75 1/0

**Thickness:** .007"

**Upper Temp Limit:** 1000° F

**Breaking Strength:**

**Warp:** 250 lb.f./in.

**Fill:** 250 lb.f./in.

All statements herein are expressions of opinion which we believe to be accurate and reliable but are not intended as recommendations for their use in the infringement of any patent. No patent warranty of any kind, expressed or implied is made or intended.

For more information on GLT Products, please visit us online at [www.gltproducts.com](http://www.gltproducts.com) or call toll-free at **1-800-874-1748**.



### HEADQUARTERS:

6810 Cochran Road | Solon OH 44139 | 440.914.1122 | 440.914.1133 Fax | **1.800.874.1748**

### DISTRIBUTION CENTERS:

**Ohio:** 6810 Cochran Road | Solon OH 44139 | 440.914.1122

**Texas:** 2902 East 13th Street, Suite 200 | Houston, TX 77571 | 713-670-9700

**North Carolina:** 109 Sands Road | Reidsville, NC 27320 | 1.800.551.9760

**California:** 4113 Gold River Lane | Stockton, CA 95215 | 1.800.833.4500