

TECHNICAL INFO

Fiberglass lagging tape knitted style 3281 with a two way stretch. Perfect for covering irregularities and corners. Meets Military Spec. MIL-C-20079F and MIL-I-24244.

Specifications:

Thread count : 15 x 13.5

Weight: 9.0 oz/sq yd


Thickness: .015"

Break strength (warp): 70

Fiberglass content: 100%

Width range: 1-8 inches

Length: 25 yards

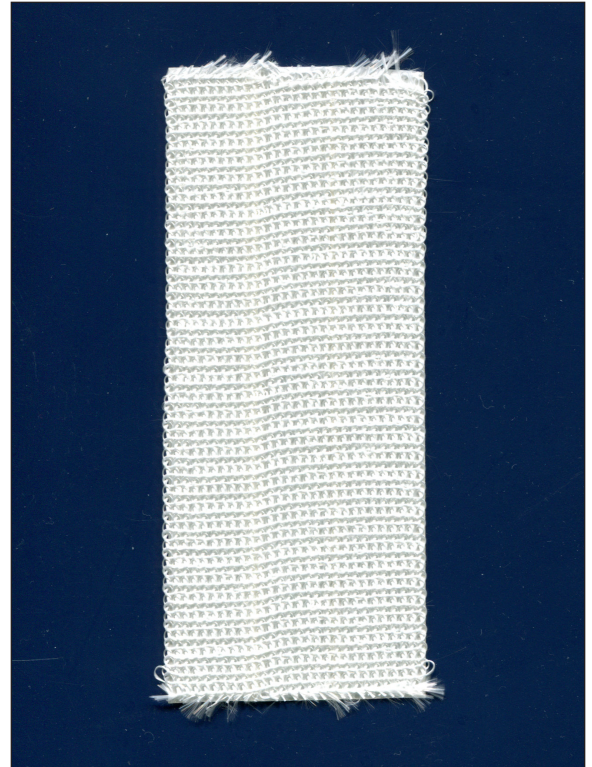

Revised 0612

For more information on GLT Products, please call toll-free at 800.874.1748 or online at www.gltproducts.com.



Innovative Insulation Systems

HEADQUARTERS:

6810 Cochran Road | Solon OH 44139 | 440.914.1122 | 440.914.1133 Fax | **1.800.874.1748**

DISTRIBUTION CENTERS:

Ohio: 6810 Cochran Road | Solon OH 44139 | 440.914.1122
North Carolina: 501 West Camel Street | Greensboro, NC 27401 | 1.800.551.9760
California: 4283 Pock Lane #200 | Stockton, CA 95206 | 1.800.833.4500
Texas: 8905 Market Street | Houston, TX 77029 | 1.800.874.1748