


Cavityrock®

Exterior Insulation for Cavity Wall and Rainscreen Applications

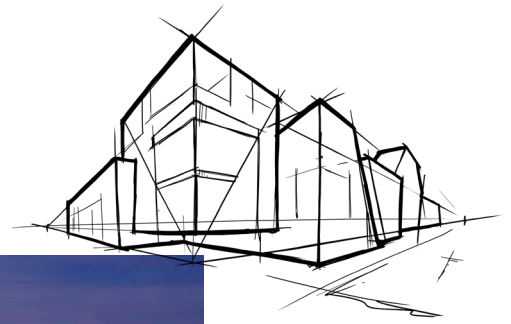

Cavityrock® Black: Now available with black mineral fiber facing for open-joint cladding systems.

Rush University Medical Center, Chicago, IL

ROCKWOOL Cavityrock® semi-rigid stone wool insulation board available in mono and dual density is designed for exterior cavity wall and rainscreen applications. Choose mono-density insulation in thicknesses up to 2" or dual-density in thicknesses of 2.5" to 6".

Compatible with numerous cladding attachment systems, Cavityrock® is a durable solution with non-combustible characteristics meaning that the insulation will not develop toxic smoke or promote flame spread even when directly exposed to fire. Approved for use in many NFPA 285-compliant designs, it is an important component of fire-resilient exterior wall systems when used as a continuous insulation.

Cavityrock® also offers energy efficiency with reliable thermal performance, improved acoustic comfort, and is moisture resistant to maintain insulating value for the long-term.

Also available in a black mat facer finish for open-joint cladding systems, Cavityrock® Black combines your insulation install with masking in a single step, reducing installation time and material cost to achieve your desired design aesthetic.

Learn more at rockwool.com/products/cavityrock/

Fire Performance

The non-combustible characteristics of Cavityrock® insulation mean that it will not develop toxic smoke or promote flame spread even when directly exposed to fire.



Cavityrock®

Exterior Insulation for Cavity Wall and Rainscreen Applications

Technical Data Sheet

Board Insulation 07210* • Board Insulation 07 21 13**
Cavity Wall Unit Masonry 04 27 23**

ROCKWOOL Cavityrock® is a semi-rigid stone wool insulation board designed for exterior cavity wall and rainscreen applications. Compatible with numerous cladding attachment systems, Cavityrock® is non-combustible and available with a black mineral fleece facing for open-joint cladding systems.

	Performance	Test Standard
Compliance	Mineral Fiber Block and Board Thermal Insulation - Type IVB Compliant	ASTM C612
	MEA Approval, New York City Approval	236 - 05 - M
	For information on CAN/ULC S702 compliance, contact ROCKWOOL Technical Support	
Reaction to Fire	Flame spread index = 0; Smoke developed index = 0	ASTM E84 (UL 723)
	Flame spread index = 0; Smoke developed index = 0	CAN/ULC S102
	Determination of Non Combustibility of Building Materials - Non Combustible	CAN/ULC S114
	Behaviour of materials at 750°C - Non Combustible	ASTM E136
Reaction to fire (with black mat facer)	Flame spread index = 10; Smoke developed index = 25	ASTM E84 (UL 723)
	Flame spread index = 10; Smoke developed index = 10	CAN/ULC S102
Monolithic Density (thickness: 1", 1.5", 2")	> 4.3 lbs/ft ³ (>69 kg/m ³)* * Density will change with thickness, please contact ROCKWOOL for more information	ASTM C303
Density (thickness ≥ 2.5")	Dual Density - 6.2 lbs/ft ³ (100 kg/m ³) outer layer and 3.8 lbs/ft ³ (61 kg/m ³) inner layer	ASTM C303
Dimensional Stability	Linear Shrinkage = 0.7% @ 1200°F (650°C)	ASTM C356
Corrosion Resistance	Stress Corrosion Cracking Tendency of Austenitic Stainless Steel - Passed Corrosion of Steel - Passed	ASTM C795 ASTM C665
Thermal Resistance	R-Value / inch @ 75°F 4.3 hr.ft ² .F/Btu RSI value / 25.4 mm @ 24°C 0.75 m ² K/W	ASTM C518 (C177)
Reaction to Moisture	Moisture Sorption - 0.03% by volume	ASTM C1104
	Water Vapor Transmission, Desiccant Method - 1555ng/Pa.s.m ² (27 perm)	ASTM E96
	Determination of Fungi Resistance - Passed	ASTM C1338
Reaction to moisture (with black mat facer)	Moisture Sorption - 0.65% by volume	ASTM C1104
	Water Vapor Transmission, Desiccant Method - 2435ng/Pa.s.m ² (43 perm)	ASTM E96
	Determination of Fungi Resistance - Passed	ASTM C1338
Dimensions	1" (25.4 mm) to 4" (101.6 mm) in 1/2" increments. 5" (127 mm) and 6" (152.4 mm) 24" x 48" (610 mm x 1219 mm) and 16" x 48" (406 mm x 1219 mm)	
Dimensions (with black mat facer)	2" (25.4 mm) to 6" (101.6 mm) in 1" increments (5" and 6" limited to 24 x 48 dimension) 24" x 48" (610 mm x 1219 mm) and 16" x 48" (406 mm x 1219 mm)	
Acoustical Performance	Thickness	125 Hz 250 Hz 500 Hz 1000 Hz 2000Hz 4000 Hz NRC
	1.5"	0.19 0.55 1.03 1.06 1.02 1.01 0.9
	2"	0.26 0.71 1.14 1.09 1.04 1.03 1
	3"	0.72 0.93 0.88 0.84 0.9 0.97 0.9

Issued 01-01-18
Supersedes 08-23-17



Please contact ROCKWOOL for Declare labels for other ROCKWOOL manufacturing facilities.

NOTE: *Master Format 1995 Edition **Master Format 2004 Edition. As ROCKWOOL has no control over installation design and workmanship, accessory materials or application conditions, ROCKWOOL does not warranty the performance or results of any installation containing ROCKWOOL's products. ROCKWOOL's overall liability and the remedies available are limited by the general terms and conditions of sale. This warranty is in lieu of all other warranties and conditions expressed or implied, including the warranties of merchantability and fitness for a particular purpose.